


APR: KIIDDA	Drawn: R.BATES	Checked: M.BUTLER	Approved: G.PLITH	Date: 28/08/14
-------------	----------------	-------------------	-------------------	----------------

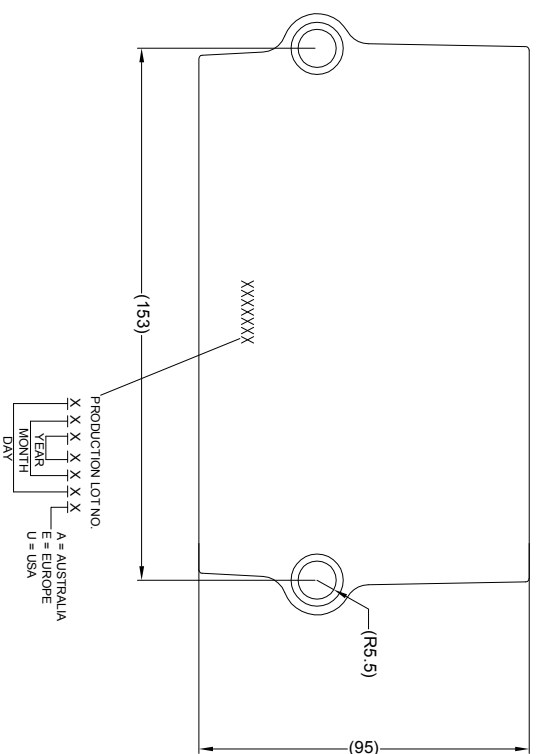

1. RATED VOLTAGE : 12-24 VOLTS DIRECT CURRENT (WORKING VOLTAGE RANGE 10THRU 32 VOLTS
2. TEST VOLTAGE : 14-28 VOLTS DIRECT CURRENT
3. RATED CURRENT : 1 AMPERES OR LESS
4. SOUND PRESSURE AT TEST VOLTAGE : MAX 107±4dB(A) - MIN 87±4dB(A)
5. SOUND PRESSURE SELF-ADJUSTING : +5dB±4dB TO EXTERNAL NOISE
6. TONE: WHITE SOUND (BBS)
7. INTERMITTENCE: 70±10 CYCLES PER MINUTE AT TEST VOLTAGES
8. ENVIRONMENTAL TESTS: SAE J994.

1. MATERIAL: NYLON 6 (G15% BLACK)
2. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING BE-002833-XX-14.
3. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING BE-002834-XX-14.
4. "R TRIANGLE" INDICATES CHANGES MADE TO REVISION OF DRAWING AS IDENTIFIED IN REVISION NOTES

Assembly PI Approval -	Approved by	Checked by	Drawn by
	DIERAL	MBUTLER	JNEWMAN
Angle of Projection	Units	Scale	Released
	mm	N/A	02/03/10
 Third Angle	Status	SA-BBS-107	
	RELEASED		
Part No	BE-001468-01-11		
	1400		

BRIGADE®
www.brigade-electronics.com