

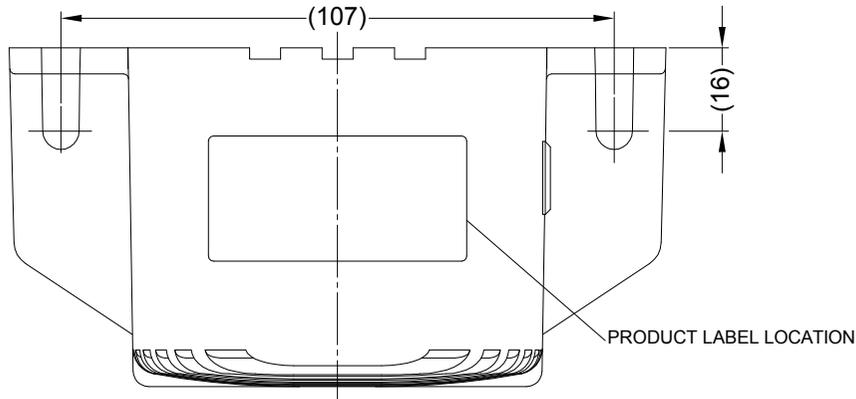
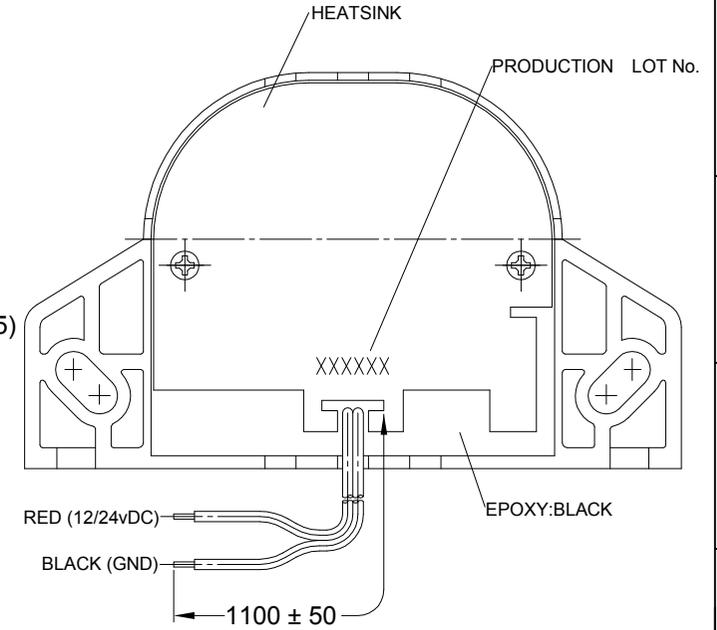


Revision Notes				
R1 - NOTES UPDATED TO INCLUDE LABEL DETAILS, STANDARDS UPDATED AS PER ECR CR-A274.				
APA: K.IIDA	Drawn:R.BATES	Checked:M.BUTLER	Approved:G.PLITH	Date: 28/08/14

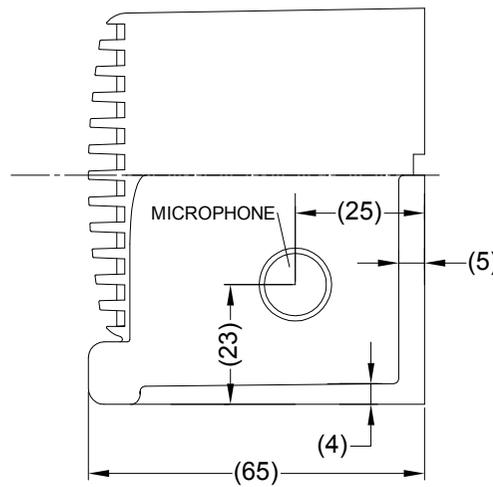

SPECIFICATION:

1. RATED VOLTAGE : 12*24 VOLTS DIRECT CURRENT (WORKING VOLTAGE RANGE 10THRU 32 VOLTS)
2. TEST VOLTAGE : 14*28 VOLTS DIRECT CURRENT
3. RATED CURRENT : 1 AMPERES OR LESS
4. SOUND PRESSURE AT TEST VOLTAGE : MAX 97±4dB(A) - MIN 77±4dB(A) @ 1.2M
5. SOUND PRESSURE SELF-ADJUSTING : +5dB±4dB TO EXTERNAL NOISE
6. TONE:WHITE SOUND (BBS)
7. INTERMITTENCE:70±10 CYCLES PER MINUTE AT TEST VOLTAGES
8. RANGE OF OPERATING TEMP.GUARANTEED:-40°C THRU 85°C
9. ENVIORNMENTAL TESTS: SAE J994.

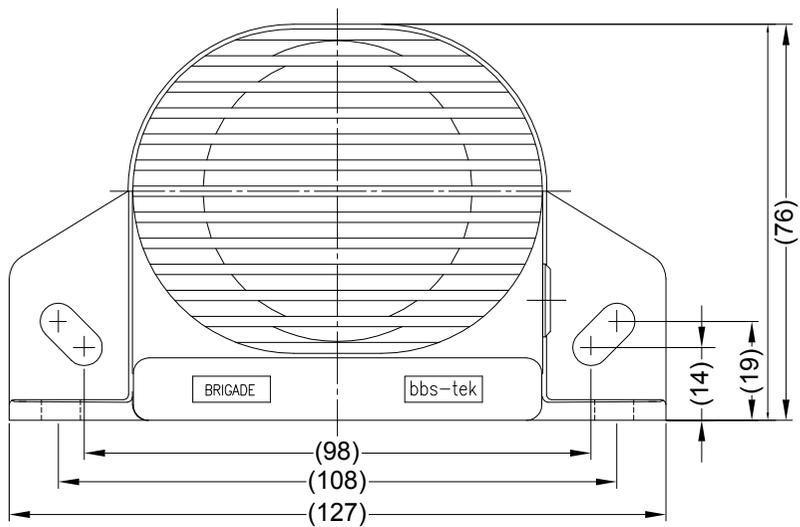

- NOTES:
1. FOR PRODUCT LABEL REFER TO LATEST REVISION OF DRAWING: BE-002833-XX-14.
 2. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF DRAWING: BE-002834-XX-14.
 3. "R TRIANGLE" INDICATES CHANGES MADE TO REVISION OF DRAWING AS IDENTIFIED IN REVISION NOTES.

PROPRIETARY NOTICE
 THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE[®]
 www.brigade-electronics.com

Assembly Pl Approval -	Approved by D.KERAI	Checked by D.KERAI	Drawn by M.BUTLER
Angle of Projection 	Units mm	Scale N/A	Released 13/08/08
	Status RELEASED	SA-BBS-97	
	Part No #1399	BE-000636-01-08	